


# IGN400 Product Manual

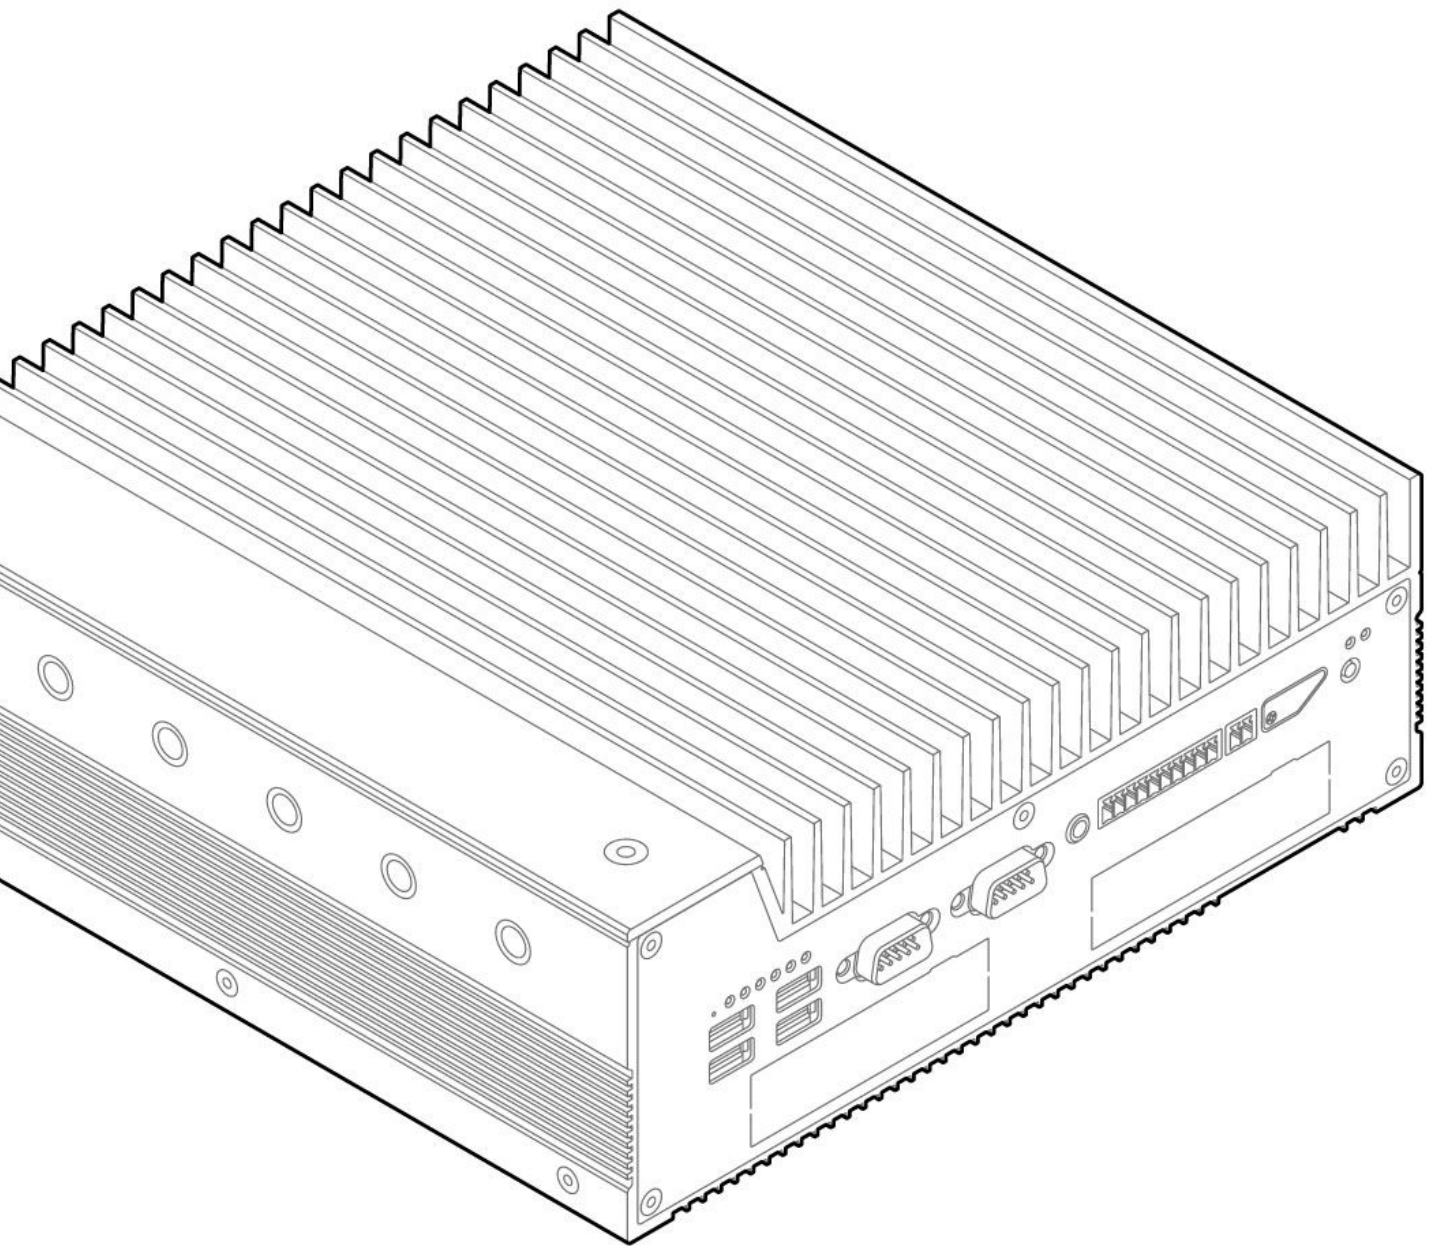


# Revision History

Revision History	Date
First release of IGN400 manual	10/29/2019

<b>1 - System Overview</b>	<b>5</b>
<b>1.1 - Accessories</b>	<b>5</b>
<b>1.2 - Product Specifications</b>	<b>6</b>
<b>1.3 - Exterior Features and Dimensions</b>	<b>8</b>
1.3.1 - Front I/O	8
1.3.2 - Back I/O	8
1.3.3 - IGN400 Dimensions	9
<b>1.4 - Motherboard Overview</b>	<b>10</b>
1.4.1 - System Block Diagram	10
1.4.2 - Motherboard Features	11
<b>2 - I/O Definitions</b>	<b>13</b>
<b>2.1 - Serial Ports</b>	<b>13</b>
<b>2.2 - DIO</b>	<b>14</b>
2.2.1 - DIO Connection Diagram	15
<b>2.3 - Remote Power Switch</b>	<b>15</b>
<b>2.4 - LEDs</b>	<b>16</b>
<b>2.5 - Automotive Ignition Power Sensing (IGN)</b>	<b>17</b>
<b>2.6 - CAN Bus</b>	<b>17</b>
2.6.1 - CAN Bus Connection Diagram	18
<b>2.7 - LAN</b>	<b>18</b>
<b>3 - Mounting Instructions</b>	<b>19</b>
<b>3.1 - Wall Mount</b>	<b>19</b>
<b>3.2 - Wall Mount with Vibration Isolation</b>	<b>20</b>
<b>4 - Microcontroller</b>	<b>21</b>
<b>4.1 - Overview</b>	<b>21</b>
<b>5 - Power Management</b>	<b>21</b>
<b>5.1 - Wake-Up Events</b>	<b>21</b>

<b>5.2 - Protection Circuitry</b>	<b>22</b>
<b>6 - Test Reports</b>	<b>22</b>
<b>6.1 - ISO 7637-2 and ISO 16750-2 Summary</b>	<b>22</b>
6.1.1 - Electrical Supply/Load Voltage Drop Data	22
6.1.2 - Paragraph 4.11 Voltage Withstand Test Results	23
<b>6.2 - Electrical Supply/Load Disturbance Data</b>	<b>23</b>
6.2.1 - Paragraph 4.7 Reverse Voltage Test Results	23
6.2.2 - Paragraph 4.9 Open Circuit Test Results	24
6.2.3 - Paragraph 4.10 Open Circuit Test Results	24
6.2.4 - Paragraph 4.12 Open Circuit Test Results	24
<b>6.3 - Conducted Transient Data</b>	<b>25</b>
<b>6.4 - EN 50121-3-2 Summary</b>	<b>25</b>
6.4.1 - ESD Immunity Data	25
6.4.2 - Radiated Immunity Data	25
6.4.3 - Electrical Fast Transient Immunity Data	26
6.4.4 - Surge Immunity Data	26
6.4.5 - Conducted Immunity Data	26

# 1 - System Overview

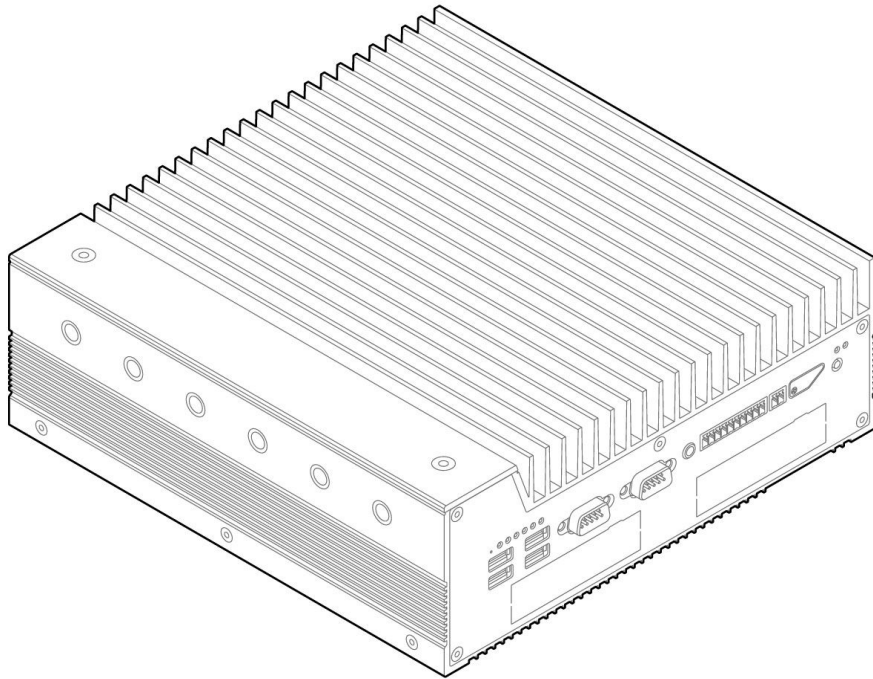

## 1.1 - Accessories

- 5-pin Power Terminal Block Connector (Dinkle PN: 2ESDVM-05P)
- 2-pin Remote Switch Terminal Block Connector (Dinkle PN: EC350V-02P)
- 3-pin CAN bus Terminal Block Connector (Dinkle PN: EC350V-03P)
- 10-pin DIO Terminal Block Connector (Dinkle PN: EC350V-10P)
- 5-pin Terminal Block to 6-pin Molex Adapter (OnLogic PN: CBP133)
- SATA Power and Data Cables If Not Installed (OnLogic PN: CBD123)

If you purchased additional items such as mounting brackets, power supplies or antennas, they will be located in the system box or within the outer shipping carton.









All drivers and product guides can be found on the corresponding product page. For more information on accessories and additional features, visit the IGN400 pages at:

US: <https://www.onlogic.com/ign400/>

EU: <https://www.onlogic.com/eu-en/ign400/>


## 1.2 - Product Specifications

	<b>IGN400 Series</b>
<b>Processor</b>	Intel 8th Gen Coffee Lake & 9th Gen Coffee Lake Refresh LGA1151 Celeron, Pentium, Core & Xeon E up to 80W
<b>Memory</b>	2 DDR4-2666 SO-DIMM up to 64GB total (non-ECC or ECC)
<b>Chipset</b>	Intel C246
<b>Integrated Graphics</b>	Intel UHD Graphics 610/630
<b>Front I/O</b>	1 Power button 4 USB 3.1 Gen 1 Type A 2 Serial RS-232/422/485 1 3.5 mm audio jack (mic-in, stereo out) 8-bit isolated DIO (4-in, 4-out) 8 Status LEDs 2-pin Remote switch 1 Mini-SIM slot (2FF) 2 Hot-swap drive bays (optional)
<b>Back I/O</b>	5-pin Power input 3 Full-size DisplayPort 1.2 supporting DP++ and HDMI 1.4 3 Gb LAN (2 Gb Mode A PoE optional) 2 USB 3.1 Gen 1 Type A 2 ModBay™ expansion slots 3-pin CAN bus 2.0B 1 External fan connector
<b>Expansion &amp; Storage</b>	1 M.2 2280 M-key (PCIe x4, SATA) 1 M.2 2230/60/80 M-key (PCIe x2) 1 M.2 2230 E-key (PCIe x1, USB 2.0) 2 Full-length mPCIe (1 duplexed with mSATA) 2 2.5" SATA SSD/HDD drives (hot-swap optional) 1 PCIe x16 <i>Max. PCIe dimensions: 211 x 129 x 41 mm (8.31 x 5.08 x 1.61 in)</i>
<b>Special Features</b>	OnLogic Microcontroller (MCU) Automotive Ignition Power Sensing SuperCap backup for RTC battery Optional TPM 2.0 module (Nuvoton NPCT750)
<b>Operating Systems</b>	Windows 10, Ubuntu 18.04
<b>LAN Controllers</b>	1 Intel I219-LM with AMT support 2 Intel I210-AT
<b>Voltage Input</b>	9~48 VDC with 5-pin terminal block
<b>Dimensions</b>	IGN400: 240 x 242 x 82 mm (9.45 x 9.53 x 3.23 in)
<b>Mounting</b>	Wall/surface (bottom) Wall/surface with Vibration Isolation (bottom)


<b>Temperature</b>	<p>Operating Temperature: -40°C ~ 70°C (35W TDP CPU)  -40°C ~ 50°C (60W TDP CPU)  -40°C ~ 40°C (80W TDP CPU)</p> <p>Storage Temperature: -40°C ~ 85°C</p>
<b>Humidity</b>	<p>Operating Humidity: 10~95% relative  Storage Humidity: 0~95% relative</p>
<b>Shock &amp; Vibration</b>	<p>Shock: Tested according to IEC 60068-2-27 and MIL-STD-810G  Vibration: Tested according to IEC 60068-2-64 and MIL-STD-810G</p>
<b>Certifications</b>	<div data-bbox="534 633 635 705"></div> <div data-bbox="681 656 928 689"> FCC 47 CFR Part 15 </div> <div data-bbox="534 792 635 866"></div> <div data-bbox="681 736 1272 931"> <p>Low-Voltage (2014/35/EU)  Electromagnetic Compatibility (2014/30/EU)  Radio Equipment (2014/53/EU) - Only applicable  for configurations with wireless transmitters  EN 55032  EN 55035</p> </div> <div data-bbox="504 952 663 1001"></div> <div data-bbox="681 960 967 996"> RoHS 3 (2015/863/EU) </div> <div data-bbox="529 1030 635 1137"></div> <div data-bbox="681 1088 1043 1124"> WEEE Directive (2012/19/EU) </div> <div data-bbox="534 1155 635 1182"></div> <div data-bbox="534 1214 635 1292"></div> <div data-bbox="681 1207 876 1305"> <p>IEC 60068-2-27  IEC 60068-2-64  MIL-STD-810G</p> </div> <div data-bbox="509 1332 657 1402"></div> <div data-bbox="681 1337 1048 1402"> <p>Power Immunity According to  E-Mark 7637-2 &amp; 16750-2</p> </div> <div data-bbox="552 1440 619 1523"></div> <div data-bbox="681 1467 807 1500"> EN 50121 </div>

## 1.3 - Exterior Features and Dimensions

### 1.3.1 - Front I/O

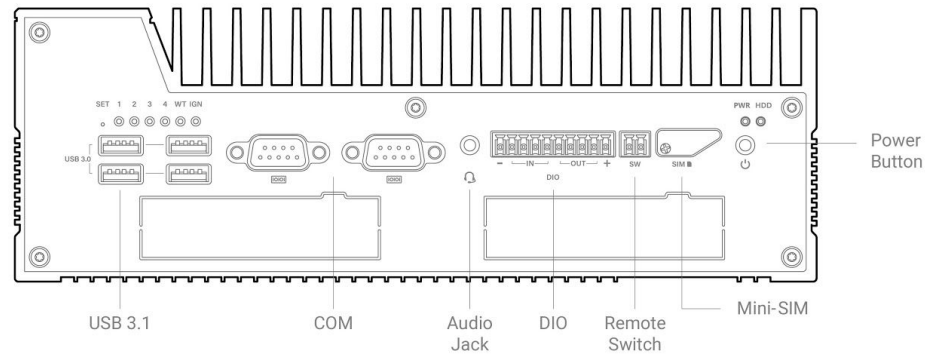


### 1.3.2 - Back I/O

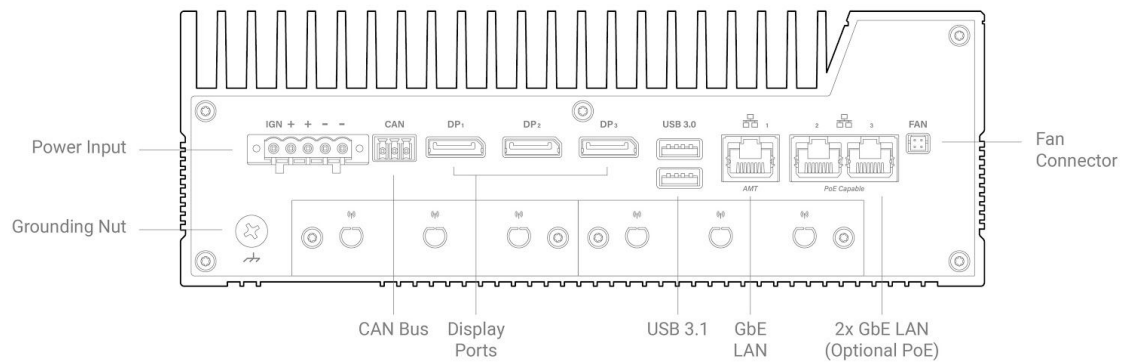




### 1.3.3 - IGN400 Dimensions

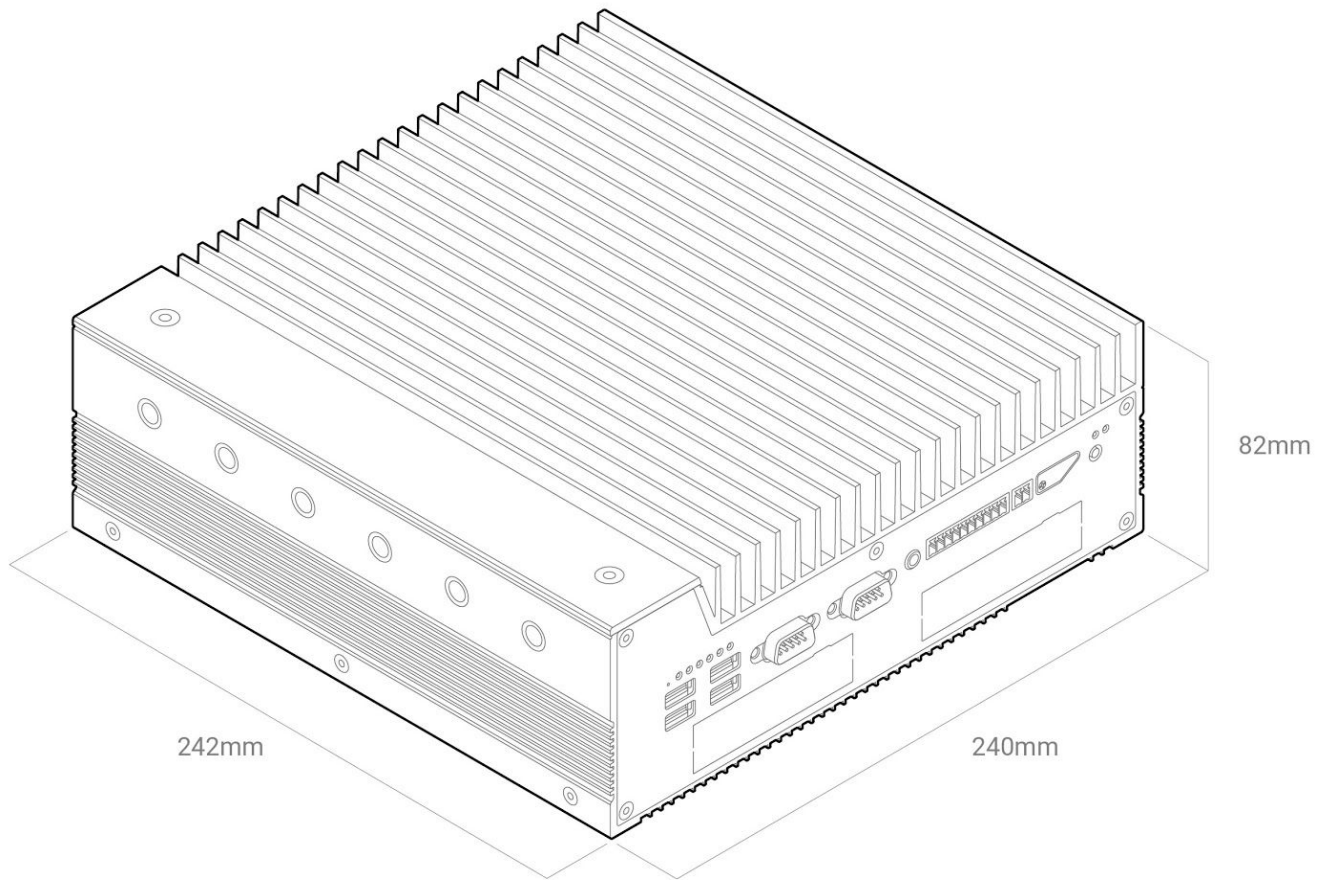


## 1.4 - Motherboard Overview

### 1.4.1 - System Block Diagram

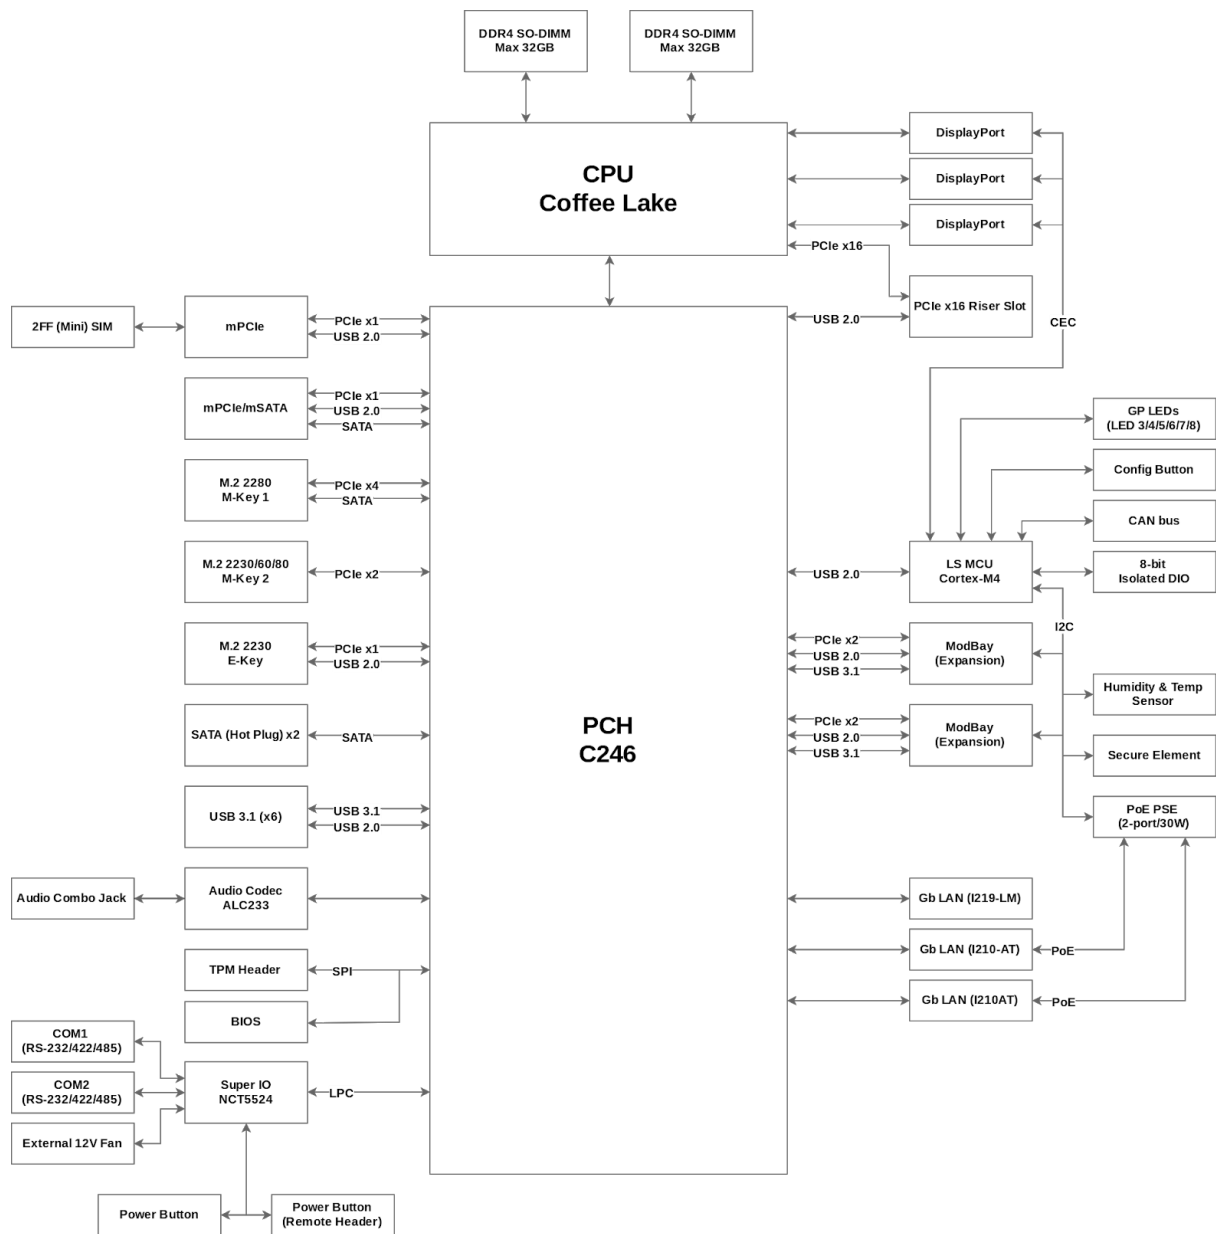

## 1.4.2 - Motherboard Features

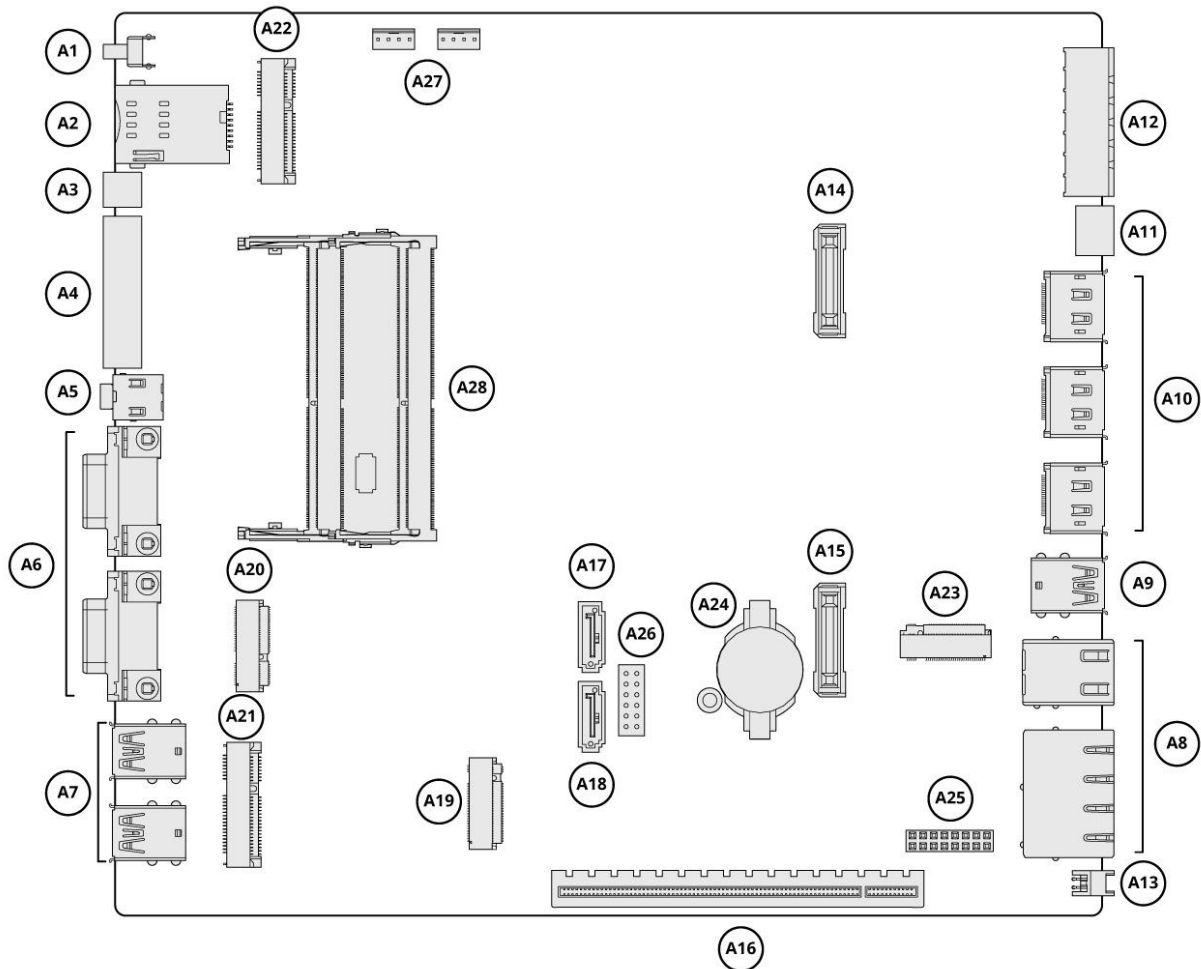


Item	Function Description
A1	Power button
A2	SIM card holder
A3	Remote switch
A4	8-bit isolated DIO (10 pins, 4-in, 4-out)
A5	3.5 mm combo audio connector
A6	COM RS-232/422/485 ports
A7	USB 3.1 Gen 1 Type A
A8	3 RJ45 GbE LAN connector (2 PoE optional with A25 module)
A9	USB 3.1 Gen 1 Type A

A10	Full-size DisplayPort with CEC support
A11	3-pin CAN bus
A12	5-pin power input with ignition sense
A13	External fan connector
A14	ModBay™ connector 1
A15	ModBay™ connector 2
A16	PCIe riser slot (x16 lanes)
A17	SATA 1
A18	SATA 2
A19	M.2 2230/60/80 M-key
A20	M.2 2230 E-key
A21	mPCIe/mSATA
A22	mPCIe
A23	M.2 2280 M-key
A24	RTC backup battery
A25	Onboard PoE module header
A26	TPM module header
A27	2 SATA power
A28	2 SO-DIMM memory slots

## 2 - I/O Definitions

### 2.1 - Serial Ports


The serial port mode and voltage between Off/5V/12V on Pin 9 on IGN400 can be selected in the BIOS configuration. The serial ports support RS-232, RS-422, and RS-485 configurations. Refer to the BIOS manual for configuration instructions.

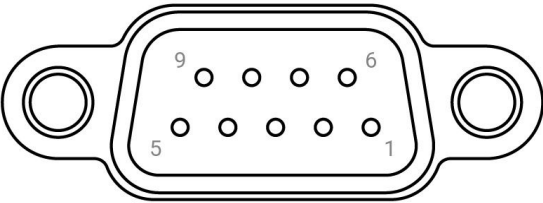	Pin	RS-232	RS-422	RS-485
	1	DCD	TX-	TX-/RX-
	2	RX	TX+	TX+/RX+
	3	TX	RX+	NC
	4	DTR	RX-	NC
	5	GND	NC	NC
	6	DSR	NC	NC
	7	RTS	NC	NC
	8	CTS	NC	NC
	9	RI/PWR	NC/PWR	NC/PWR

NC = Not Connected

## 2.2 - DIO


The IGN400 Digital Input Output (DIO) or General Purpose Input Output (GPIO) terminals are optically isolated. This means that the terminal is separated from other motherboard features for protection. The DIO terminal requires external power from a 5~48VDC source through Pin 10 with GND to Pin 1 in order to function.

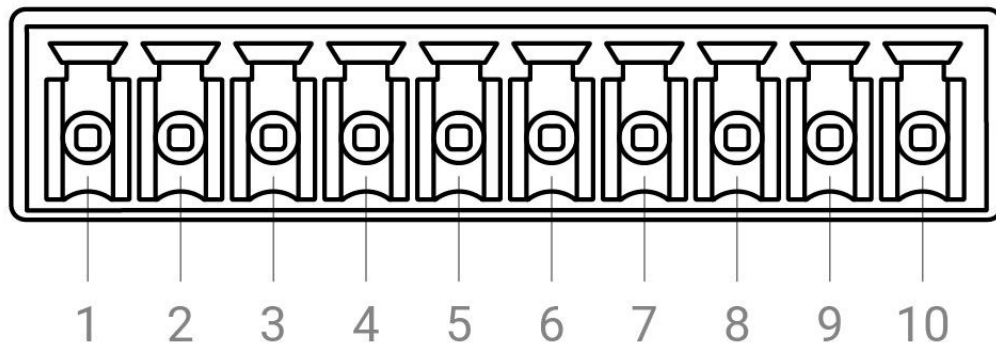


Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9	Pin 10
GND	In 4	In 3	In 2	In 1	Out 4	Out 3	Out 2	Out 1	Power

## 2.2.1 - DIO Connection Diagram


Karbon 700

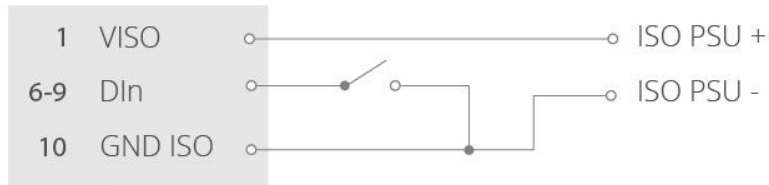

Karbon 700

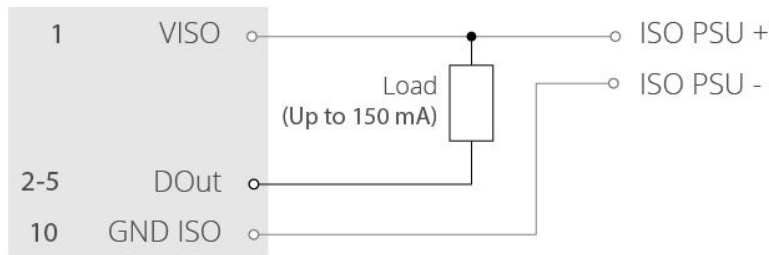


Karbon 700

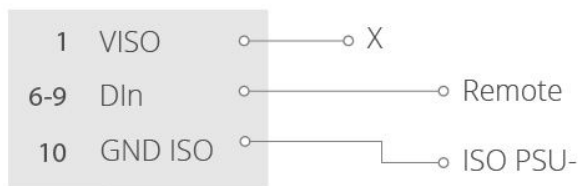


The Isolated Power Supply (ISO PSU) can be a voltage source from 5V-48V to interface with external digital IO. The max power draw from the supply should not exceed 0.6A under normal operating conditions. Individual DOut pins will be damaged by a load in excess of 150mA. The ISO PSU can only be a DC Limited Power Source (LPS) power supply.

## 2.3 - Remote Power Switch

	Pin	Definition
	1	GND
	2	Power

Mating power switch cables should be a twisted-pair wire with floating shield to assure proper immunity to EMI/RFI. It is recommended to keep wires at less than 3 meters in length. Switches should be momentary contact type only.

## 2.4 - LEDs


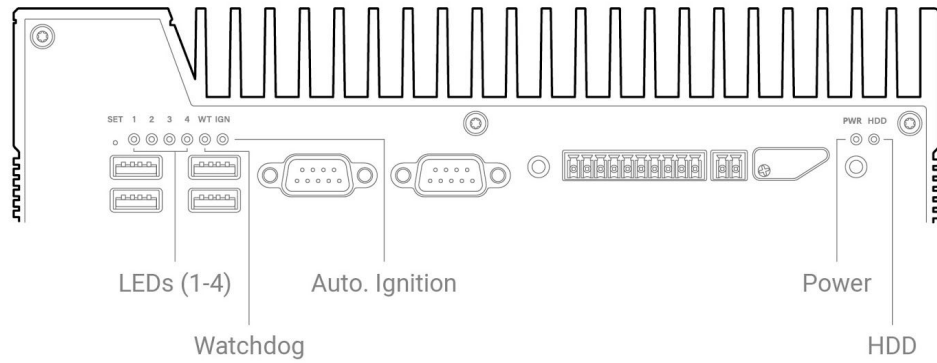


LED	On	Off	Blink	Pulse
<b>HDD</b>	-	-	Internal storage drive activity	-
<b>Power</b>	Device is on	Device is off	Device is asleep	-
<b>Automotive Ignition</b>	Ignition input to device is on	Ignition input to device is off	-	-
<b>Watchdog</b>	MCU is not functioning normally	MCU is not functioning normally	Firmware bootloader is active	MCU is functioning normally
<b>LEDs 1-4</b>	Currently selected user mode	Currently selected user mode	-	-



## 2.5 - Automotive Ignition Power Sensing (IGN)


The IGN400 5-pin power input terminal offers automotive ignition sensing. The ignition sensing timing for power on and off delays can be modified through OnLogic's microcontroller (MCU) using serial commands. These commands allow setting the delay on startup after ignition is detected, the delay until soft and hard shutdown when ignition is lost, and enabling/disabling ignition sensing. For more information on ignition power sensing, and instructions on using these serial commands from Windows or Linux, visit [OnLogic's tech support site on the Karbon series ignition sensing](#).

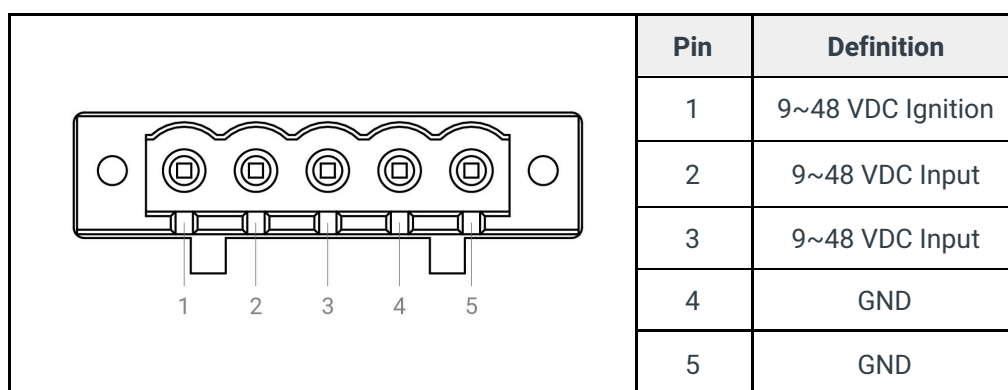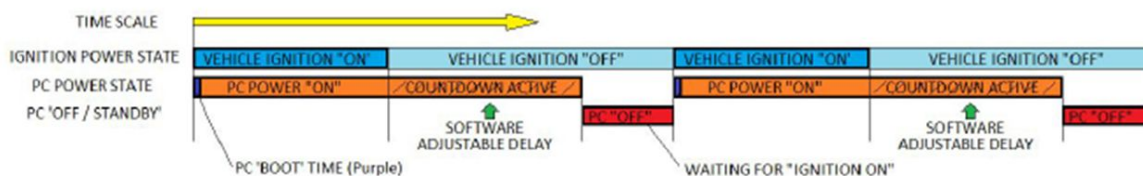


The system should always be used with the supplied 5-pin terminal block. The total system power draw and input voltage will determine whether only two of the power pins can be used. Configurations with high wattage CPUs (65W or more), PoE ModBay cards, or GPU expansion must use all 4 power pins. Low voltage supplies (9~12V) should also use all 4 power pins. If only two of the input pins are used, it is recommended to use a jumper between the populated and open connection.

## 2.6 - CAN Bus

See Section 4 for information on how to drive the CAN bus.

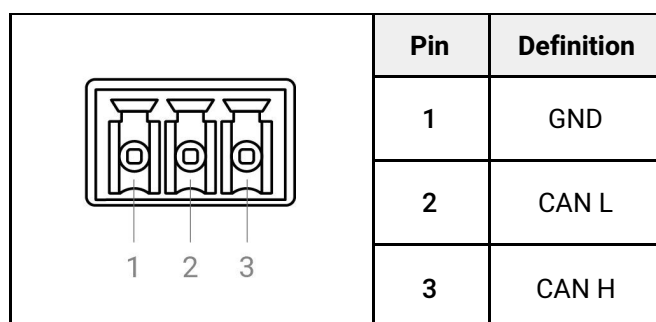


## 2.6.1 - CAN Bus Connection Diagram

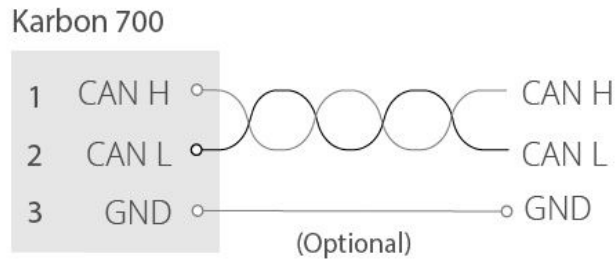

## 2.7 - LAN

The IGN400 provides three GbE LAN ports. Two of these LAN ports have an optional PoE function using an optional onboard module. When the PoE module is installed, the two PoE ports will provide up to 32W of combined power. This power output is enough to support a single port up to 25.5W (IEEE 802.3at), two ports up to 15.4W each (IEEE 802.3af), or two ports with a combined draw up to 32W (e.g. 7W and 25W). PoE is enabled by adding the optional PoE Expansion card.

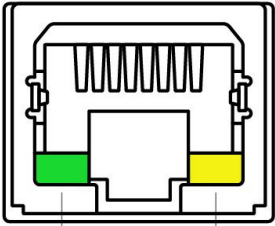 Link LED (Green)      Speed LED (Green/Yellow)	LED	Color	State	Condition
	Link	-	Off	LAN link is not established
		Green	On	LAN link is established
			Blinking	LAN activity occurring
	Speed	-	Off	10 Mb/s data rate
		Green	On	100 Mb/s data rate
		Yellow	On	1000 Mb/s data rate

## 3 - Mounting Instructions

### 3.1 - Wall Mount



**Step 1:** Attach wall mounting brackets to the chassis using:

Screw type: M4X0.7 T10 TORX 120

Length: 10 mm

**Step 2:** Mark and prepare holes on the surface for mounting

**Step 3:** Fasten system to surface. The mounting bracket systems are required to secure 3x the hanging weight of the computer system. The mating substrate must be capable of maintaining the same rating.

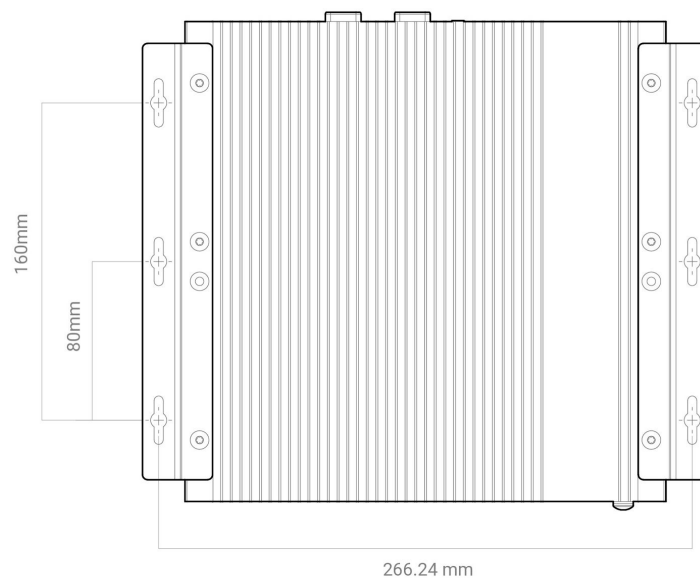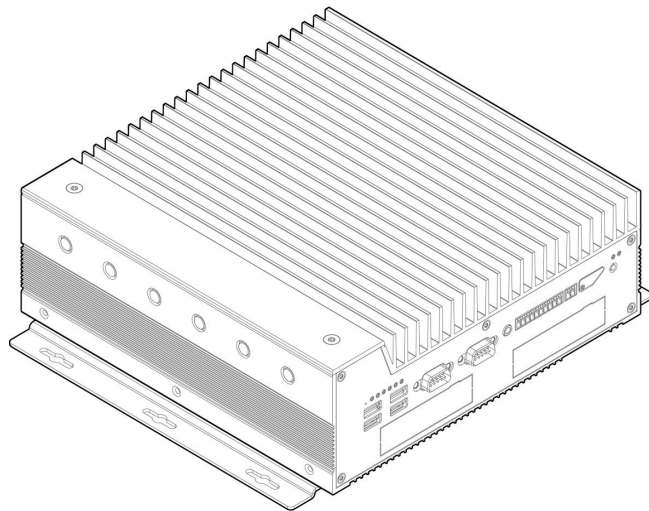

## 3.2 - Wall Mount with Vibration Isolation




**Step 1:** Attach wall mounting brackets to the chassis using:

Screw type: M4X0.7 T10 TORX 120

Length: 10 mm

**Step 2:** Mark and prepare holes on the surface for mounting

**Step 3:** Fasten system to surface

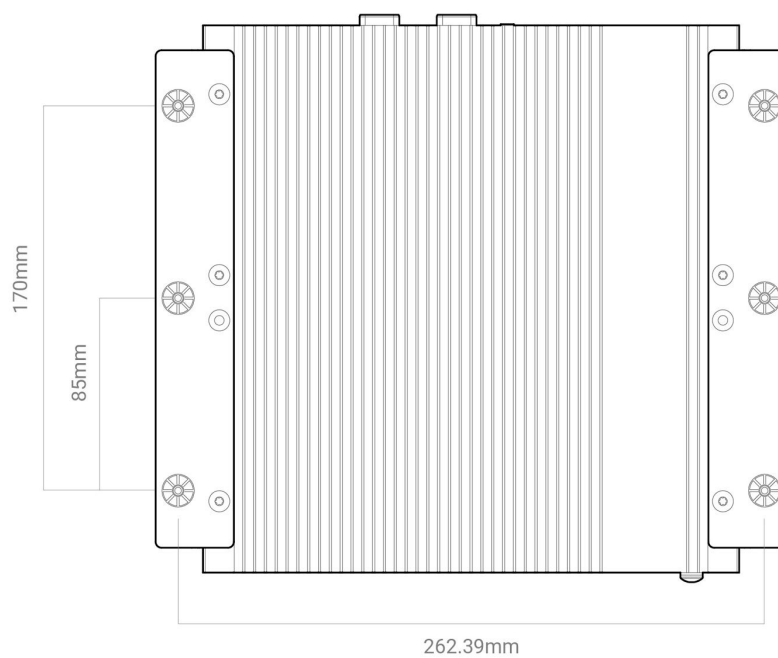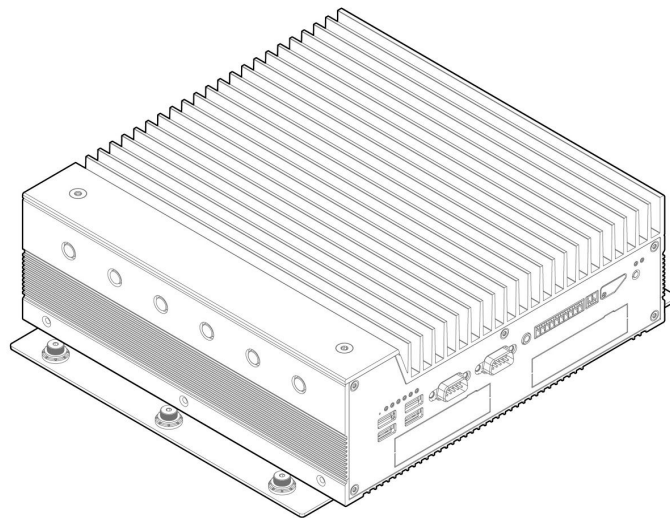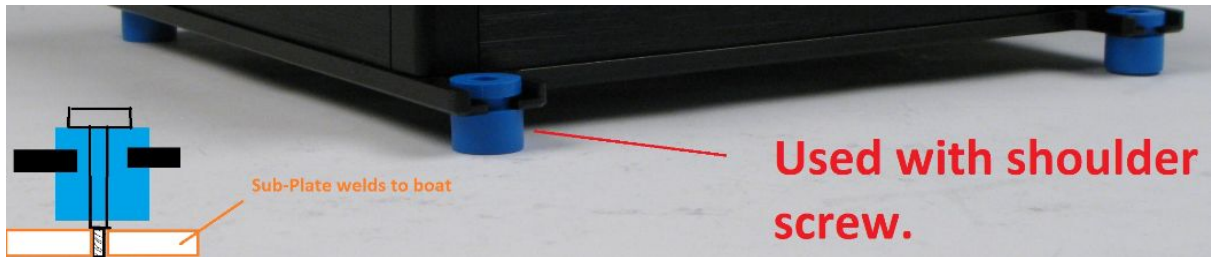

## 4 - Microcontroller

### 4.1 - Overview

The microcontroller on IGN400 controls several systems, including:

- Automotive ignition power sensing
- CAN bus
- DIO
- Status LEDs
- Power management and wake-up
- DisplayPort CEC and persistent EDID
- Input voltage monitoring

A segment is exposed for user control via two serial ports. By reading and writing to these serial ports, the user can send and receive CAN messages, read/set the DIO state, and select from a number of configuration options. One port is dedicated to IGN400's CAN bus, while the other doubles as a serial terminal and the DIO interface. Any configuration settings may be saved to non-volatile memory which means the MCU settings will be retained during a long power-off.

To learn more about how to use the IGN400 series MCU and Pykarbon interface tools, visit our [Karbon Series technical support site](#).

## 5 - Power Management

### 5.1 - Wake-Up Events

IGN400 supports multiple power states. The wake-up events can be configured in the MCU and BIOS. This section describes the power management functions you can perform and gives information on protection circuitry for power adapters.

Wake-Up Event	From ACPI State	Comments
Power Button	VR-Disabled, S5, S3	
Ignition	VR-Disabled, S5, S3	Must be enabled in MCU
Digital Input	S5, S3	Must be enabled in MCU
LAN	S5, S3	Must be enabled in BIOS
USB	S3	
RTC Alarm	S5, S3	Must be enabled in BIOS

## 5.2 - Protection Circuitry

Parameter	Value
Nominal operating voltage (Rated DC value of input)	9~48V
Undervoltage protection trip DC level (system turns off)	7.6V
Overvoltage protection trip DC level (system turns off)	52.5V
Maximum safe DC voltage (system not damaged)	56V
Minimum safe reverse voltage (system not damaged)	-36V
Ignition pin safe working voltage (system not damaged)	56V

These DC levels specified are the absolute max values for the pins for function and safety of the system. The protection circuitry allows for brief transient voltages above these levels without the system turning off.

## 6 - Test Reports

### 6.1 - ISO 7637-2 and ISO 16750-2 Summary

The OnLogic, Inc. Model IGN400 PC meets ISO 7637-2 and ISO 16750-2 requirements for conducted transients and supply/load disturbance. Sections IX through XI reference measurement procedures of VIII-1 through -7 in accordance with performance criteria described in Section V for type acceptance and per the manufacturer's test plan.

#### 6.1.1 - Electrical Supply/Load Voltage Drop Data

The table below describes the results of the electrical load test. The system does not exhibit susceptibility to voltage drop profiles and pulses delivered directly to power lines.

"A" result = No effect on EUT.

"C" result = Operator intervention required.

"C" is an acceptable result for the test of 4.5 per the standard. The unit recovers and operates normally once the voltage returns to specified levels per the datasheet (Operates at >5 VDC).

ISO 16750-2 Paragraph	Voltage	Application Port	Duration	Cycle/PRT	Spec.	Result
4.3	36V	Power Entry	60 m	1	A	A
4.4	10V 50Hz - 25 kHz	Power Entry	120 s	5	A	A
4.5	9V to 0V 0V to 9V	Power Entry	1080 ms 1080 ms	1	C	C
4.6.1	9V to 9V	Power Entry	100 ms @ 10 s	1	B	A
4.6.2	9V to 0V .45V steps	Power Entry	300 s	1	C	A
4.6.3	24V to 10V with 2V AC profile	Power Entry	1150 ms	10	A	A
4.6.4.2.2	151V	Power Entry	100 ms	10	A	A
4.6.4.2.3	151V/58V	Power Entry	100 ms	5	C	A

### 6.1.2 - Paragraph 4.11 Voltage Withstand Test Results

500 VDC for 60 s. > 10 mA or catastrophic event to fail.

Test Point	Notes	Current (mA)
Main Input	Class C	3.01

## 6.2 - Electrical Supply/Load Disturbance Data

The tables below describe the results from the ISO 16750-2 electrical load tests. The system does not exhibit susceptibility to disturbances delivered directly to power lines.

### 6.2.1 - Paragraph 4.7 Reverse Voltage Test Results

@ 28 VDC for 60 s.

Test Point	Notes	Current (mA)
Main Input	Class A	0

### 6.2.2 - Paragraph 4.9 Open Circuit Test Results

@ 0 VDC for 10 s.

Test Point	Notes	Current (mA)
Main Input Single Lead	Class C	0
Main Input Both Leads	Class C	0

### 6.2.3 - Paragraph 4.10 Open Circuit Test Results

@ 32 VDC for 60 s.

Test Point	Notes	Current (mA)
Main Input	Outputs Active, Class C	0
Main Input	Outputs Inactive, Class C	0
Main Input	Supply Inactive, Class C	0

### 6.2.4 - Paragraph 4.12 Open Circuit Test Results

@ 500 VDC, <10 MΩ to fail.

Test Point	Notes	Resistance (MΩ)
Main Input	Class C	>1000 MΩ



## 6.3 - Conducted Transient Data

The table below describes the results of the transient test. The system does not exhibit susceptibility to conducted transients delivered directly to power lines.

“A” result = No effect on EUT.

Pulse	Voltage V	Application Port	Duration	Cycle/PRT	Spec.	Result
1	-450	Power Entry	500	500 ms	A	A
2a	+55	Power Entry	500	200 ms	A	A
2b	+20	Power Entry	10	500 ms	A	A
3a	-220	Power Entry	1 hour	100 ms	A	A
3b	+220	Power Entry	1 hour	100 ms	A	A

## 6.4 - EN 50121-3-2 Summary

The IGN400 PC complies with the EN 61000-6-4 radiated and conducted

emissions limits as tailored by EN 50121-3-2. The unit passes EN 50121-3-2, Table 5 levels for ESD and radiated immunity. The unit also passes EN 50121-3-2, Tables 3 & 4 levels for EFT, conducted, and surge immunity.

All EN 50121-3-2 testing on the IGN400 PC was performed without the use of an AC-DC external power adapter. Instead, a direct DC power input was used.

### 6.4.1 - ESD Immunity Data

The unit does not exhibit susceptibility to 4-kV and 6-kV contact/8-kV air discharges applied singly or repetitively, and directly or indirectly. The relative humidity during unit testing was measured to be between 30% and 60%. The IGN400 PC was unaffected during testing.

### 6.4.2 - Radiated Immunity Data

The system does not exhibit susceptibility to 20/10/5/3-V/m radiated electric fields, amplitude modulated at 1000 Hz, 80%, from 80 MHz to 6 GHz. Frequencies listed are samples and spots. The IGN400 PC was unaffected during testing.

### 6.4.3 - Electrical Fast Transient Immunity Data

The system does not exhibit susceptibility to 0.5-kV/1-kV/2-kV electrical fast transients, delivered in 5-kHz bursts to power lines. "A" result = No effect on EUT.

The system does not exhibit susceptibility 0.5-kV/1-kV/2-kV electrical fast transients, delivered in 5-kHz bursts to signal lines. The IGN400 PC was unaffected during testing.

### 6.4.4 - Surge Immunity Data

The system does not exhibit susceptibility to 1-kV line-to-line/2-kV line-to-ground, 1.2/50us-combination wave surges delivered directly or by 90°- and 270°-phase synchronizations. The IGN400 PC was unaffected during testing.

### 6.4.5 - Conducted Immunity Data

The system does not exhibit susceptibility to 3/1-V conducted signals applied, using the injection probe, to the signal lines from 150 kHz to 80 MHz. Frequencies listed are samples; dwell >EUT response time. The IGN400 PC was unaffected during testing.