


# CL210G-11

## Our Smallest Fanless PC

Ultra-reliable and feature rich, the CL200 Series combines the ease of x86 architecture with our Hardshell™ Fanless Technology in an Ultra Small Form Factor.

[onlogic.com/cl210g-11](https://onlogic.com/cl210g-11)

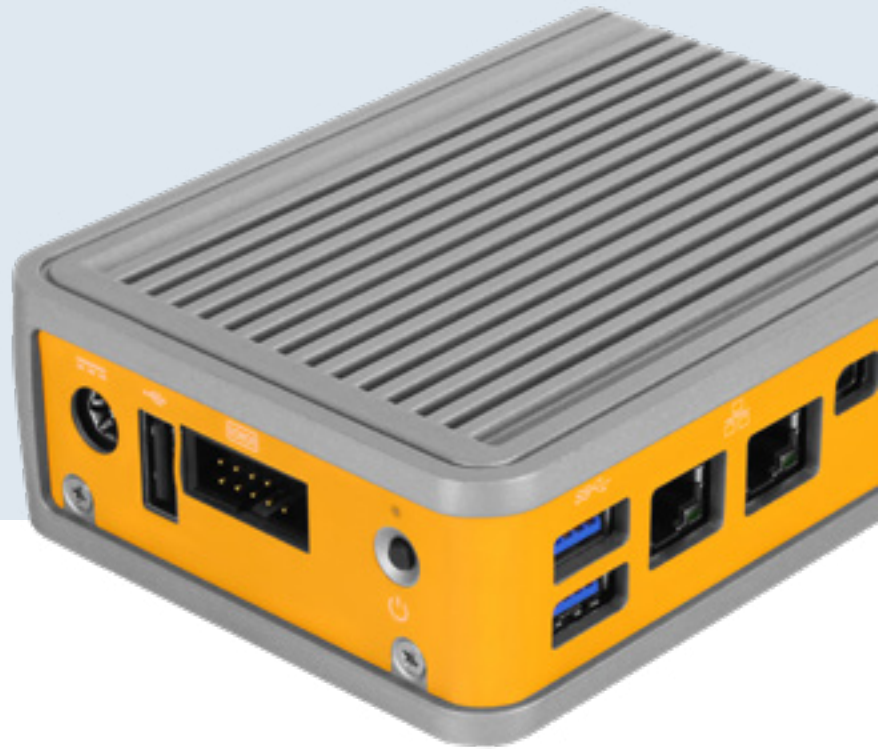

### IoT Ready (4G)



Ready for the Industrial IoT edge, the CL200 Series is configurable with 4G LTE capability or Wi-Fi and Bluetooth - all in one ultra-small device.

### Fanless Design

Hardshell Fanless Technology seals components in a durable, ventless enclosure that cools and protects the system. Measuring at just 34 mm x 115 mm x 82 mm, the CL200 Series installs virtually anywhere.

### x86 Architecture

The CL200 Series makes development easy and integration seamless, thanks to its x86 architecture. Backed by a stable Linux or Windows 10 OS, the CL200 Series lets you focus on optimizing your application.

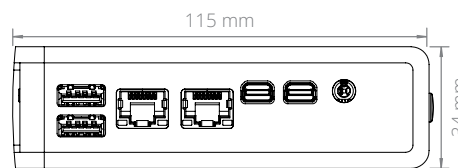

### US Office

Phone: +1 802 861 2300 | Email: [info@onlogic.com](mailto:info@onlogic.com) | [www.onlogic.com](http://www.onlogic.com)

### EU Office

Phone: +31 088 5200 700 | Email: [info@onlogic.eu](mailto:info@onlogic.eu) | [www.onlogic.com](http://www.onlogic.com)

## System

Processor	Intel Pentium N4200
Processor Speed	1.1 GHz
Processor Cores	4
Integrated Graphics	Intel HD Graphics 500
Memory	LPDDR4 4 GB

## Rear I/O

USB	1 USB 2.0 port
Serial	1 COM Port (RS-232)
Power	1 DC Input Jack (12 V)
Other	Power Button, power indicator LED 1 MicroSD Card slot

## Front I/O

USB	2 USB 3.0 Ports
Ethernet	2 Gb LAN Ports with Realtek RTL8111G
Video	2 Mini-DisplayPort
Other	1 Audio Jack (Mic-in, Line-out)

## Side I/O

Other	4 Antenna jacks
-------	-----------------

## Expansion & Features

Expansion & Storage	1 PCIe Mini Card (Half-Height) MicroSD Card mSATA (Shared PCIe Mini Card Slot)
Features	64 GB onboard EMMC Storage

## Mechanical

Dimensions (WxHxD)	115 mm x 82 mm x 34 mm
Mounting Options	DIN-mount VESA-mount Wall-mount

## Environmental & Regulatory

Operating Temperature	0°C ~ 40°C
Certifications	2002/96/EC (WEEE Directive) 2011/65/EU (RoHS 2 Directive) Additional Safety and EMC certifications pending CB scheme CE EN 55024 EN 55032 EN 62368-1 FCC 47 CFR Part 15 IEC 62368-1 IP50 UL Listed

### US Office

Phone: +1 802 861 2300 | Email: [info@onlogic.com](mailto:info@onlogic.com) | [www.onlogic.com](http://www.onlogic.com)


### EU Office

Phone: +31 088 5200 700 | Email: [info@onlogic.eu](mailto:info@onlogic.eu) | [www.onlogic.com](http://www.onlogic.com)


## CL210G-11 Dimensional Drawings

Industrial USFF Edge Device


All measurements in mm

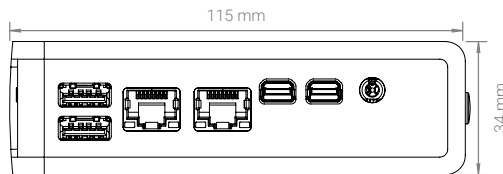


CL210G-11 FRONT

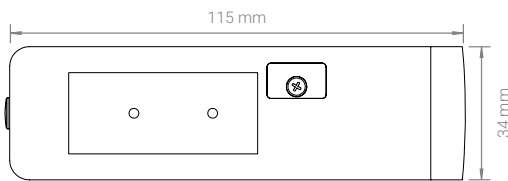

BACK

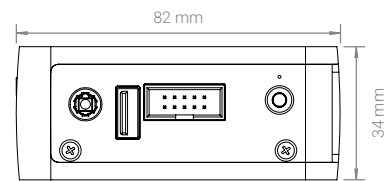

SIDE

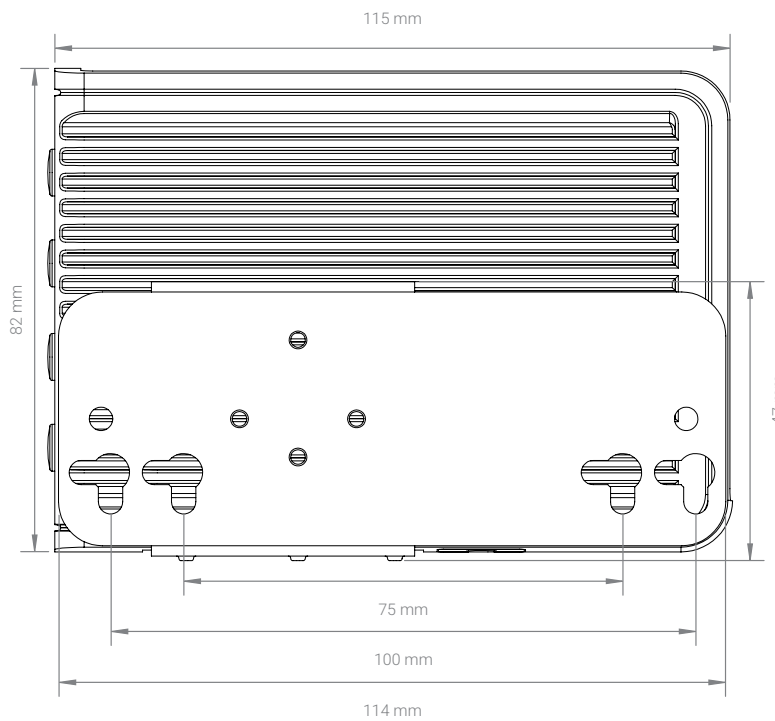

TOP

### US Office


Phone: +1 802 861 2300 | Email: [info@onlogic.com](mailto:info@onlogic.com) | [www.onlogic.com](http://www.onlogic.com)

### EU Office


Phone: +31 088 5200 700 | Email: [info@onlogic.eu](mailto:info@onlogic.eu) | [www.onlogic.com](http://www.onlogic.com)

## EPM162 Dimensional Drawings


All measurements in mm

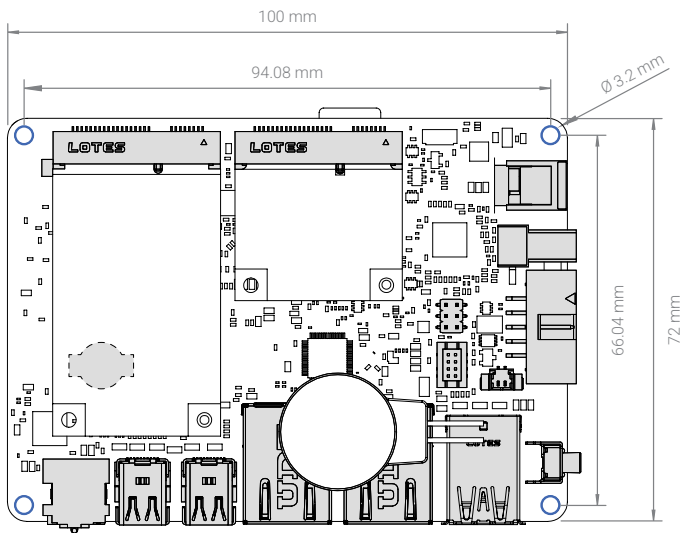


TOP

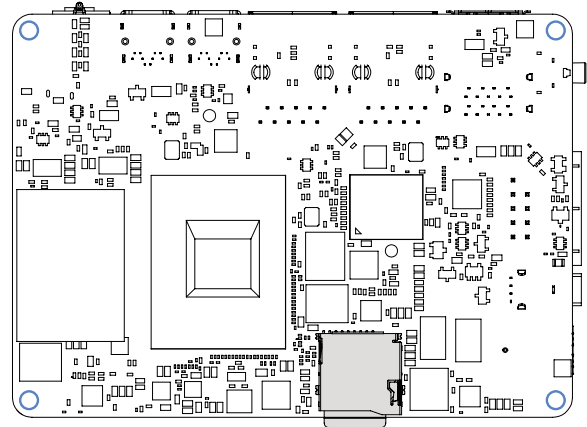

BOTTOM

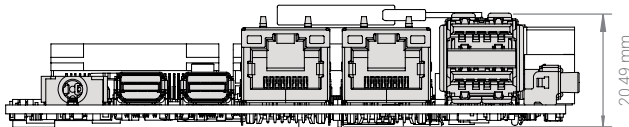

FRONT

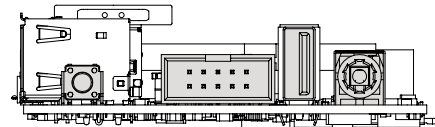

SIDE