

TM100

The TM100 features an ACP-enabled ThinManager® BIOS, providing a versatile and highly reliable fanless thin client virtualization solution.



onlogic.com/tm100



Mighty Efficient

Don't compromise processing power for energy efficiency. Requiring as little as 7.5 W, the TM100 lets you do more with less.

No Vents, No Fans, No Worries

Your application demands more than a plastic case. The TM100's high-performance fanless and ventless aluminum chassis keeps components cool while keeping dust out.

Built for a Connected World

Engineered for demanding commercial use, the I/O on the TM100 lets you connect the devices and peripherals you need. The TM100 features an HDMI dual independent display.



US Office

Phone: +1 802 861 2300
Email: info@onlogic.com
www.onlogic.com

EU Office

Phone: +31 85 2733760
Email: info@onlogic.eu
www.onlogic.eu

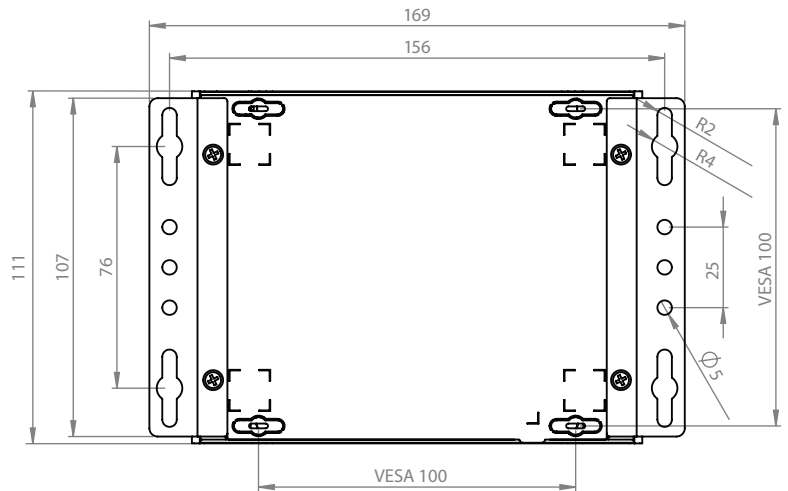
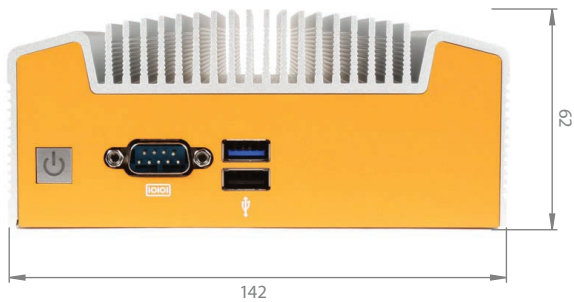
Industrial Compact Thin Client with ThinManager

Specifications

TM100

Front I/O	1 USB 2.0 port 1 USB 3.0 port 1 RS422/RS485/RS232 COM port Power button	Memory Type	DDR3L SO-DIMM (non-ECC)
Rear I/O	2 USB 2.0 ports 2 Gb LAN ports 1 Line-out connector 2 HDMI ports 1 DC jack	Memory Capacity	Up to 8 GB
Processor	Intel Celeron N2930	Memory Speed	1333 MHz
Processor Generation	Bay Trail	LAN Controller	Intel 82583V PCIe GbE
Processor Cores	4	Input Voltage	9 ~ 24 V
Graphics/GPU	Intel HD Graphics	Power Input	DC jack
		Operating Temperature	0°C ~ 50°C
		Dimensions (mm)	142 W x 62 H x 111 D
		Case Material	Steel With Aluminum Extrusion
		Mounting	VESA MIS-D 100 mount, Wall-mount

Dimensional Drawings

All dimensions in mm

onlogic.com/tm100


US Office

Phone: +1 802 861 2300

 Email: info@onlogic.com
www.onlogic.com

EU Office

Phone: +31 85 2733760

 Email: info@onlogic.eu
www.onlogic.eu