

# MC610-51

## Industrial Intel® 10th Gen Comet Lake Mini-ITX Expandable Computer

Combining efficient active cooling and PCIe x4 expansion with Intel 10th Gen Core™ processing, the MC610-51 is perfect for your next edge computing project.

[onlogic.com/mc610-51](https://onlogic.com/mc610-51)



### Powered By 10th Gen Intel Comet Lake



The MC610-51 owes its powerful processing capabilities to Intel's 10th Gen Comet Lake Core CPU options. The system can be configured with your choice of a Core i3/i5/i7 or i9, and can accommodate up to 64GB of RAM (contact us for more details about memory options).

### Efficient Cooling And Flexible Mounting

With an all-metal chassis designed for embedded applications, the MC610-51 keeps it's cool even while accomplishing the most compute-intensive tasks. Optional wall, DIN, and VESA mounting let you securely install the MC610-51 on virtually any vertical or horizontal surface.

### Customizable For Your Unique Project Needs

The MC610-51 features an M.2 M 2280, an M.2 E 2230, PCIe x4 and a full size mPCIe slot to accommodate a wide range of customization and storage options in its internal expansion bay. Dual Gb LAN provides flexible networking options, while its 4x USB 3.2 Gen 1 ports, HDMI and DisplayPort allow you to easily connect your displays and peripherals.

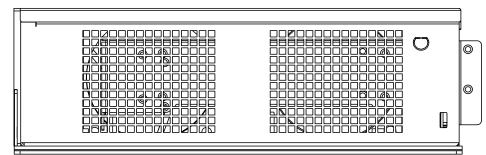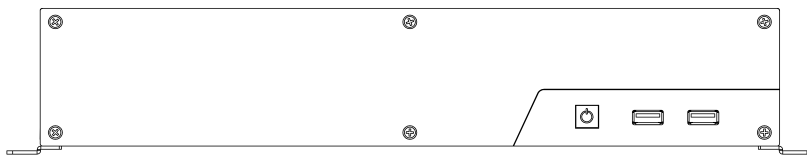

#### US Office

Phone: +1 802 861 2300 | Email: [info@onlogic.com](mailto:info@onlogic.com) | [www.onlogic.com](http://www.onlogic.com)

#### EU Office

Phone: +31 088 5200 700 | Email: [info@onlogic.eu](mailto:info@onlogic.eu) | [www.onlogic.com](http://www.onlogic.com)

System	
Processor	Intel Comet Lake
Processor Speed	1.9 GHz 2 GHz 2.3 GHz 2.8 GHz 2.9 GHz 3 GHz
Processor Socket	LGA1200
Processor Generation	10th Generation
Processor Cores	Up to 10 (processor dependent)
Chipset	Intel H410
Graphics/GPU	Intel HD Graphics
Memory Type	DDR4 SO-DIMM (non-ECC)
Memory Capacity	64 GB
Memory Speed	2400 MHz 2666 MHz
Memory Slot Count	2
Number of Displays Supported	2

Rear I/O	
Ethernet	2 Gb LAN ports
USB	4 USB 3.2 Gen 1 ports
Video	1 DisplayPort Connector 1 HDMI
Audio	2 Audio Jacks (Mic-in; Line-out)

Front I/O	
USB	2 USB 2.0 ports
Other	Power button (DC Jack)
Port Punchouts	2 Serial 2 USB 3 Antenna holes

Expansion & Features	
Expansion Options	1 M.2 2230 slot 1 PCIe Mini Card slot (full/half height) 1 PCIe x16 slot
Storage Options	2 SATA III 2.5" Drives 1 SATA M.2 M Key 2242/2260/2280 slot
LAN Controller	Intel I211-AT GbE Intel I219LM GbE
System Monitoring	Watchdog Timer
Input Voltage	12 VDC

Mechanical	
Dimensions (WxHxD)	334 x 64 x 199.6 mm 13.1" x 2.5" x 7.9"
Case Type	Compact
Case Material	Aluminum Steel
Mounting Options	DIN-mount VESA-mount Wall-mount

Environmental & Regulatory	
Operating Temperature	0 - 50°C
Certifications	FCC 47 CFR Part 15 CE RoHS 2 (2011/65/EU) RoHS 3 (2015/863/EU) EN 55022 EN 55024 EN 55032 EN 60950-1

Other	
Compatible Cloud Services	AWS IoT Greengrass Compatible
Warranty	2 Year Limited Warranty on parts and services

## US Office

Phone: +1 802 861 2300 | Email: info@onlogic.com | www.onlogic.com

## EU Office

Phone: +31 088 5200 700 | Email: info@onlogic.eu | www.onlogic.com

## MC610-51 Dimensional Drawings

Industrial Mini-ITX Expandable Computer

All measurements in mm

